

# Adaptive Datagram Transport Protocol Over Ad-hoc Network – TCP Fairness

M. Senthil Kumaran

Associate Professor, Department of CSE,  
SCSVMV University, Enathur, Kanchipuram, India

**Available online at: [www.ijcseonline.org](http://www.ijcseonline.org)**

Received: Apr/16/2016

Revised: May/01/2016

Accepted: May/17/2016

Published: May/31/2016

**Abstract** - High-speed and satellite networks are emerging fast in the communication domain. Bandwidth Delay Products (BDP) plays an important role in the design of a congestion control algorithm for the effective usage of network resources. Bandwidth-delay products (BDPs) are referred as the maximum amount of unacknowledged data that allowed in flight at any moment in the network. TCP is originally designed for a general wired network. In case of BDP, packet losses rarely occur. TCP can no longer guarantee good bandwidth utilization.

For MANETs having extremely small BDPs and frequent packet losses cannot use the existing transport protocol. Numerous solutions proposed to provide reliable packet delivery in MANETs in recent years. Solutions proposed to provide reliable packet delivery in MANETs are non-TCP variants and TCP variants. Non-TCP variants focus on the modification of congestion control algorithms in the transport protocol. It requires complicated mathematical computation and incur excessive network overhead. Although relatively accurate congestion information obtained, it cannot retain the end-to-end semantics of a transport protocol. TCP variants adopts Additive Increase Multiplicative Decrease (AIMD) congestion control algorithm with unnecessary large transmission windows.

The proposed model develops an improved Datagram Transport Protocol over Ad Hoc Networks (DTPA) for MANETs. The improvement is carried out in the direction of achieving fairness in the TCP flow of the MANET. Adaptive Max-Min Fairness algorithm is deployed in the proposed DTPA improvement. The proposal work provides an effective datagram-oriented end-to-end reliable transport protocol DTPA (Datagram Transport Protocol over Ad Hoc Networks) incorporating, a fixed-size window-based flow-control algorithm and a cumulative bit-vector-based SACK (selective ACK) strategy. The proposal also guarantees reliable transmission and recovering packet losses. It improves the network performance in terms of throughput, round-trip time, number of retransmissions, and IP queue size demonstrated by simulation conducted using NS2.

**Keywords:** MANET, DTPA, TCP, Protocols

## I. INTRODUCTION

Recent advances in wireless communication technology and portable devices have generated much interest in wireless mobile ad hoc networks (MANETs). A MANET is a collection of wireless devices moving in seemingly random directions and communicating with one another without the aid of an established infrastructure. It is characterized by low variable bandwidths, high variable delays, significant non congestion-related packet losses, and occasional communication blackouts due to route breakages. Under such operating conditions, the traditional reliable transport-layer protocol TCP, which is used widely in the wired Internet, is not suitable for MANETs. The proposal of this work is carried out in the direction of analyzing congestion control algorithm and the strategy used to guarantee reliable delivery. Finally propose an effective reliable transport protocol over MANETs.

Bandwidth-delay products (BDPs) represent the maximum amount of unacknowledged data that are allowed in flight at any moment in the network. When the amount of traffic

injected by a source exceeds the BDP of the connection, the excessive packets that are queued in the network lead to undesirable queuing delays and congestions. Correspondingly, the network cannot be fully utilized when the total packets in the network are less than the BDP. As such, the BDP plays an important role in the design of a congestion control algorithm for the effective usage of network resources. For a window-based transport protocol like TCP, the transmission window size must be carefully adjusted for networks with different BDP values. TCP was originally designed for a general wired network where the BDP is not very large and packet losses rarely occur. However, with the emergence of various types of networks such as high-speed and satellite networks, TCP can no longer guarantee good bandwidth utilization. It is desirable that the system knows the BDP for each connection in advance so that it can limit the amount of traffic pumped into the network and maintain the optimum throughput.

In traditional wired networks, the TCP source is unaware of the available BDP and dynamically determines it by creating congestion during the transmission. However, in

MANETs, the BDP of a path can be determined in advance by using routing protocols such as DSR and AODV. This allows the transport layer to intelligently set its transmission window before connection establishment. In our proposed improved DTPA, the transmission window is fixed at a small value, which is as low as several packets. The proposed mathematical model calculates the optimum transmission window size, and its value has been found to be equal to the BDP of the path plus 3. More effort should be put into the ability of the scheme to quickly detect and recover the lost packets. This paper is organized in five sections. Section 1 is an introduction part, section 2 carries the literature review, section 3 discussed about the proposed method, section 4 deals with the experimental results and section 5 deals with the conclusion.

## II. LITERATURE REVIEW

Various solutions have been proposed to provide reliable packet delivery in MANETs in recent years. Most of the existing proposals in MANETs focus on the modification of congestion control algorithms in the transport protocol. These proposals can be divided into two categories i.e., non-TCP variants and TCP variants. The schemes in [5], [6], and [7] belong to non-TCP variants, where the source adjusts the transmission rate based on explicit feedback from intermediate nodes along the path. Although relatively accurate congestion information can be obtained, the algorithms in these schemes cannot retain the end-to-end semantics of a transport protocol. Moreover, they require complicated mathematical computation and incur excessive network overhead.

In contrast with non-TCP variants, the majority of the proposals are modified versions of the legacy TCP protocol. In [8] and [9], the strategies proactively detect the incipient congestion by relying on some measured metrics at the source, such as the variation of the measured round-trip times (RTTs) and short-term throughput, since packet loss information alone cannot provide an accurate congestion indication. In [10], [11], and [12], the authors attempt to minimize the contentions between data and ACK packets by adaptively reducing the number of ACK packet transmissions in the network. The drawback of these TCP variants is that they still adopt the AIMD congestion control algorithm with unnecessary large transmission windows. Chen et al. [13] propose a scheme where the TCP sender limits the size of its maximum transmission window to the BDP of the path in multi-hop networks. However, the small transmission window leads to high AIMD costs, and the TCP source is also unable to detect the packet loss, as it does not receive sufficient duplicate ACKs, resulting in significant throughput deterioration.

Several SACK schemes have also been proposed to provide reliable delivery in the past. SACK schemes can be divided into block-based [1], [2] and bit-vector-based [3], [4] mechanisms. Block-based SACK schemes usually have relatively large ACK overheads and can carry very limited packet loss information in the face of frequent packet losses. In [4], a bit-vector-based transport protocol is proposed for MANETs. However, the protocol depends on time-outs to reactively detect packet losses, even though the ACK already carries the negative information of a packet. Both papers utilize a non cumulative technique. In contrast, our DTPA scheme relies on a cumulative technique and exploits the information of bit position in the vector to proactively predict packet losses for better accuracy. Besides the congestion control and ACK techniques mentioned above, some researchers have identified the interactions between the TCP layer and the underlying routing and MAC layers as a key factor for the poor TCP performance in MANETs. The improved DTPA address issues related to route breakages, and utilized to achieve the maximum fairness.

## III. IMPROVED DTPA – TCP FAIRNESS SCHEME

The improved DTPA works on the basic principle of DTPA that utilizes selective acknowledgement scheme and in addition uses max-min fairness algorithm to improve the TCP fairness criteria.

### A. Datagram-Based Technique

In case of datagram based technique, each datagram is sequenced. The sequence number in each data header does not represent the highest byte of that data like in TCP. With a datagram protocol, the IP fragmentation of a packet is highly undesirable during the transmission, because the fragmentation cause inefficient resource usage due to the incurrence of a higher MAC overhead. The loss of a single fragment requires the source to retransmit all of the fragments in the original datagram, even if most of the fragments are received correctly at the destination. Datagram is small enough to avoid fragmentation.

### B. Cumulative Bit Vector based SACK

ACK header illustrates the new ACK strategy. H is the highest sequence number of the datagram that has been received. There is a bit in the header named L to indicate the existence of an out-of-order data. The L flag is turned on whenever an out-of-order segment arrives, which implies that there may be missing packets. The vector field consists of k bits representing the receiving status of a set of earlier packets. Let  $a_i$  be a single bit that indicates the arrival status of the packet with sequence number  $H_i$ . Use the L flag for the realization of a cumulative acknowledgment mechanism. If the L flag in a received ACK packet is turned off, this means that the transmission is in a normal status, without data packet losses or out-of-order transmissions. Hence, an

acknowledgment of sequence number H indicates that all datagram up to H have been received.

### C. Fixed Window Flow Control

Improved DTPA employs a sliding window transmission technique. Given the number of hops n, the window size is fixed at

$$w(n) = \text{BDP}(n) + \alpha(n)$$

where  $\alpha(n)$  is a small value used to guarantee that there are enough packet transmissions and ACK arrivals at the source in case of packet losses. For instance, with  $w = \text{BDP} = 1$ , the source cannot detect the packet loss through the ACK, because there is only one packet transmission, and it is the one that is missing. A mathematical model is developed to calculate the throughput of a single DTPA flow over an n-hop ad hoc network. The throughput is derived as a function of packet loss rate, path length n, and transmission window size  $w(n)$ . Determine an appropriate transmission window with which the throughput of an n-hop chain can be maximized.

DTPA relies on the path length information provided in routing protocols such as DSR and AODV to determine the BDP of a path. In DSR, the header of each IP packet carries the instantaneous hop count information. In AODV, each route table entry at the source also contains the hop length. The hop count information provided by these routing protocols can be passed on to the transport layer so that DTPA can intelligently set its transmission window. Find the BDP of a path so that DTPA can be compatible with more routing protocols. The strategy guarantees that the network pipeline is at least fully utilized and that there is no heavy congestion and contention in the networks.

### D. Retransmission Mode

Derive a mechanism for deciding on whether to retransmit the lost packet. DTPA source decides to retransmit a packet by either the receipt of ACKs or a time-out event. The source DTPA depends on the L flag and the bit vector in the ACK header to detect the possible packet losses. It keeps a retransmission buffer for storing the incoming ACK information with a turned-on L flag on a per-connection basis. For a time-out event, the DTPA source assumes that there is no outstanding packet in the network. Since the transmission window is fixed at a value greater than one, besides retransmitting those lost packets recorded by the retransmission buffer. The source also transmits new packets if the transmission window allows. In DTPA, the Retransmission Time-Out (RTO) timer works in the same way as that in TCP. Except that it does not exponentially increase itself in the event of retransmission, because the

time-out event here implies a window's worth of packet losses rather than a heavy congestion in the system.

### E. Performance Metrics for Improved DTPA Throughput

Similar to TCP, the behavior of the DTPA protocol is regarded as a cyclic evolution. It defines one cycle as the interval between the end of one time-out event and the end of the next time-out event. The cycles form a renewal process due to the independent packet losses. The cycle duration is a random variable that is further divided into two non overlapping components at the time when the time-out occurs. It define the DTPA throughput for an n-hop static linear chain

#### Fairness

Significant TCP unfairness in ad hoc networks has been revealed. TCP unfairness is mainly attributed to the unfairness of the MAC protocol, which results from the nature of shared wireless medium and location dependency. To solve the TCP unfairness in ad hoc networks, adaptive max-min fairness algorithm is used in our DTPA model. Fairness criteria for DTPA flows in ad hoc networks are compared with improved DTPA. In multi-level scheduling for wireless ad-hoc networks the max-min fair allocation of the fair shares is made at the lower-most layer (MAC layer). It mainly lays down the framework to calculate the fair shares that would achieve max-min fairness in an ad-hoc network. Then design distributed algorithms that allow each node to determine its max-min per-link fair share in a global ad-hoc network without knowledge of the global topology of the network.

## IV. EXPERIMENTAL PERFORMANCE OF IMPROVED DTPA

The simulation of the improved DTPA model is carried out in NS-2 simulator to validate the analytical model and evaluate the performance of DTPA with improved DTPA. The simulations using static topologies interoperate with other MANET DSR and AODV to handle the mobility issues. In the simulation scenarios, all nodes communicate with identical half-duplex wireless radios with a bandwidth of 1 Mbps. The radio propagation model uses free-space attenuation at near distances and an approximation to two-ray ground at a far distance by assuming specular reflection off a flat ground plane. DSR is used as the routing protocol for improved DTPA. The packet size is set to 512 bytes, and fragmentation does not take place during transmission.

To validate the analytical model, we run a DTPA flow over the n-hop static linear chain defined in the model. Each simulation is run for 500 seconds. The data and ACK packets are discarded with probability by the receiving node rather than being dropped. Fig. 1 shows the throughput comparisons

between the AODV and DSR-DTPA (improved) simulation and results of the proposed improved DTPA model for different number of nodes. With Fig1 the throughput of the DSR-DTPA model increase when compared to that of the AODV model of transmission.

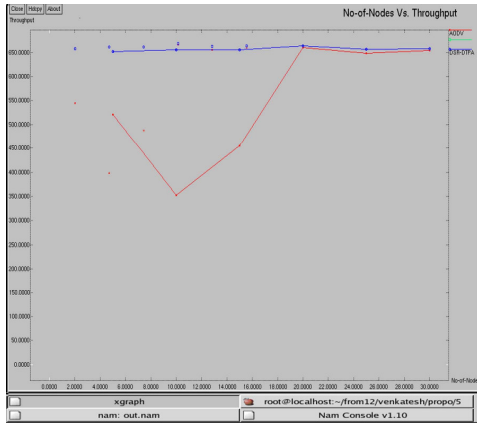


Fig. 1 Comparison of AODV with DSR-DTPA (improved) Number of nodes Vs throughput

The node variation is plotted against the packet loss rate of each transport layer packet as shown in Fig 2. Both results show that the delay decreases with even in the nodes being increased and also noted that delay for DSR-DTPA is less compared to that of the AODV routing protocol. The results from the analysis of the proposed model match closely with the simulations. It can be seen that the delay do not have a significant impact on the number of nodes being increased (Fairness criteria) with throughput performance in multihop ad hoc networks, as the improved DTPA throughput always increases with number of node variations.

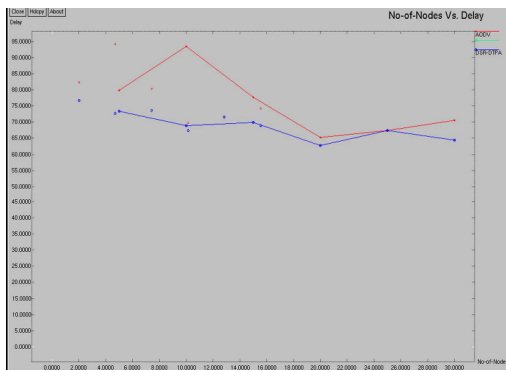


Fig. 2 Comparison of AODV with DSR-DTPA (improved) Number of nodes Vs Delay

Comparing to AODV, the throughput, average RTT, average maximum IP queue size and the number of retransmissions can, respectively, be improved by up to 35 percent. Using a small transmission window, the CWL

source sends a limited amount of packets into the networks so that it cannot detect packet losses via the reception of enough ACK packets. The source has to heavily rely on time-out events to detect and retransmit the lost packets, and correspondingly, the CWL goes back to a slow-start phase, with its transmission window dropped to one, which results in throughput degradation. As such, improved DTPA scheme can be utilized in a general ad hoc network for efficient fairness in transmission.

## V. CONCLUSION

The improved DTPA model proposed in this work had a reliable Datagram Transport Protocol over 802.11-based ad hoc networks with better fairness in multi-hop increased node transmission. As the BDP of a path in MANETs is very small, any AIMD-style congestion control algorithm is costly and is hence not necessary for ad hoc networks. On the other hand, a strategy for guaranteeing reliable transmissions and recovering frequent packet losses plays a more critical role in the design of a transport protocol. With this basis, our scheme incorporates a fixed-window-based flow control and a bit-vector-based SACK strategy with which the ACK packets contain a vector of bits representing the reception status of the set of packets that were transmitted earlier.

In addition a parameterized mathematical model for the behavior of the DTPA protocol based on a renewal process is adopted in the improved DTPA model. The model can be used for evaluating the effects of the various parameters, including the two-way traffic loss probabilities, path length, transmission window of a flow, time-out probability, etc. With NS-2 simulator, improved DTPA model is evaluated and shown that results improves the network throughput, average RTT, and decreased average delay in the network, and number of retransmissions by up to 35 percent as compared to the AODV. Since DTPA employs a window-based congestion control coupled with an ACK technique similar to TCP, it is believed that DTPA also experiences severe unfairness among competing flows in ad hoc networks. Hence, in order to provide fairness for DTPA flows in ad hoc networks, max-min algorithm is deployed in improved DTPA.

## REFERENCES

- [1] Sarah Riahi Ali El Hore and Jamal El Kafi, "Optimization of Resource Allocation in wireless systems based on Game Theory", Int. Journal of Computer Sciences and Engineering, Volume-04, Issue-01, Page No (1-13), Jan 2016.
- [2] Chen K Xue Y and Nahrstedt K, "On Setting TCP's Congestion window Limit in Mobile Ad Hoc

- Networks,” Journal of Wireless Comm. and Mobile Computing, volume -02, Issue-01, Page No (85-100), 2002.
- [3] Umesh K S , Shivilal M , Lokesh L and Kamal B , “An Overview & Study of Security Issues in Mobile Ado Networks”, International Journal of Computer Science and Information Security (IJCSIS) USA, Vol-9, No.4, pp (106-111), April 2011.
- [4] Anastasi G Ancillotti E Conti M and Passarella A, “TPA: A Transport Protocol for Ad Hoc Networks,” Proc. 10th IEEE Symp. Computers and Comm. (ISCC '05), Page No (51-56), 2005.
- [5] Chen K Nahrstedt K and Vaidya N, “The Utility of Explicit Rate-Based Flow Control in Mobile Ad Hoc Networks,” Proc. IEEE Wireless Comm. and Networking Conf. (WCNC '04), no. 1, Page No (1904-1909), 2004.
- [6] Zhai H Chen X and Fang Y, “Rate-Based Transport Control for Mobile Ad Hoc Networks,” Proc. IEEE Wireless Comm And Networking Conf. (WCNC '05), Page No (2264-2269), 2005.
- [7] Sundaresan K Anantharaman V Hsieh HY, and Sivakumar R, “ATP: A Reliable Transport Protocol for Ad Hoc Networks,” IEEE Trans. Mobile Computing, volume 4, Issue 6, Page. No. (588-603), Nov. 2005.
- [8] Fu Z Greenstein B Meng X and Lu S, “Design and Implementation of a TCP-Friendly Transport Protocol for Ad Hoc Networks”, Proc. 10th IEEE International Conf. Network Protocols (ICNP '02), Page No ( 216-225), 2002.
- [9] EIRakabawy S Klemm A and Lindemann C, “TCP with Adaptive Pacing for Multihop Wireless Networks,” Proceedings of ACM MobiHoc '05, Page No (288-299), 2005
- [10] Singh A and Kankipati K, “TCP-ADA: TCP with Adaptive Delayed Acknowledgement for Mobile Ad Hoc Networks,” Proc. IEEE Wireless Comm. and Networking Conf. (WCNC '04), Volume no. 1, Page No (1679-1684), 2004.
- [11] Oliveira R and Braun T, “A Dynamic Adaptive Acknowledgment Strategy for TCP over Multihop Wireless Networks,” Proc. IEEE INFOCOM '05, Page No (1863-1874), 2005
- [12] Altman E and Jimenez T, “Novel Delayed ACK Techniques for Improving TCP Performance in Multihop Wireless Networks,” Proc. Eighth Int'l Conf. Personal Wireless Comm. (PWC '03), Page No (237-253), 2003
- [13] Kettimuthu R and Allcock W, “Improved Selective Acknowledgment Scheme for TCP,” Proceedings of Int'l Conf. Internet Computing (IC '04), Page No (913-919), 2004.
- [14] Mathis M Mahdavi J Floyd S and Romanow A, “TCP Selective Acknowledgement Options”, IETF RFC 2018, 1996.

---

### Author Profile

Dr. M. Senthil Kumaran is working as an Associate Professor in the department of Computer Science and Engineering of SCSVMV University, Kanchipuram. He has published 11 papers in International Journals, presented more than 21 papers in international and National Conferences and published 2 books. He is a reviewer of International Journal of Communication Systems, Journal of Computer Science and International Journal of Computer Science Issues.