

Drip Irrigation and Monitoring Based On Smart Irrigation

Sanu Ann Thomas¹, Neethan Elizabeth Abraham², Reshma Chandran³, Anu Philip⁴

^{1,2,3,4}Department of ECE, Mangalam College of Engineering, Ettumanoor, Kottayam India

Available online at: www.ijcseonline.org

Received: 13/Jan/2017

Revised: 18/Jan/2017

Accepted: 23/Feb/2017

Published: 31/Mar/2017

Abstract—Water is an essential component for the development of plants in agriculture or irrigation. The paper stresses on the need of an externally hosted cloud computing platform to manage the database, android and the isolated server by the users across the country for irrigation. The system proposed in this paper uses information and communication technologies, allowing the user to consider and examine the information obtained by different sensors. Here we are using different sensors like humidity, temperature, moisture, light etc. These sensors give signal to the micro controller. Micro-controller gives the data to the isolated server through a serial communication. According to sensor values graph will be display on PC and Smart phone side and by using this graph user can on or off dripdevices. In this we keep threshold value for each sensor. The data is sent and processed on an isolated server, which stores the information from the sensors in a database, allowing further interpretation of data in a simple and flexible way. The intendedsystem may lead to enhance the farming practices, overcomingthe water crises and developing an upgraded agricultural systemforthecountry.

Keywords—Cloud, Embedded, Android, Remote Monitoring, Wireless Sensor Network

I. Introduction

Agriculture has been the spine of the Indian economy and it will continue to remain for the long time. Over 70 per cent of the rural households depend on agriculture. One-third of our National income comes from agriculture. The economic improved, started off in the country during the early 1990s, have put the economy on a higher growth rate trajectory. Annual growth rate in gross domestic product (GDP) has accelerated about 25%. Indian agriculture has registered impressive growth over last few decades. The growth in agricultural production has been still for the past several years. The significance of agriculture is:

- 1) Contribution to National Income,
- 2) Main source of Food,
- 3) Agriculture and Industrial development,
- 4) Sources of Revenue,
- 5) Source of Foreign trade.
- 6) Transport,
- 7) Source of saving,
- 8) Capital formation,
- 9) International importance,
- 10) Way of life,
- 11) Effect on prices,
- 12) Source of labor supply,
- 13) Economic development.

Our land was losing its fertility being put to cultivation continuously for years together. So we have read all the existing system and their working and we have found out that there is no system that uses the micro-controller, cloud, data mining and smart phone all together. So we are combining all the existing system to get the hybrid system. Sensor-Based irrigation system has been studied in much application. These sensors send real time values to

microcontroller and micro controller send these values to PC via serial communication [1].

The system suggests an economical and easy-to-use Arduino-based automated irrigation system that utilizes the Android smart phone for remote control. The data received by the Android smart phone from the Arduino is displayed on the User Interface [2].

The volumetric data of water utilized and crop yield were collected and the results showed that the water consumption is reduced in the automated field as compared to the manually irrigated field [3].

II. Literature Review

In this paper drip irrigation control using mobile phone. They use different sensors like humidity, temperature, light etc. for detection purpose. The sensors send real time value to microcontroller send topic via serial communication. In this system central monitoring is computer and remote monitoring is mobile phone and mobile send command via network and android application to PC. Then PC will ON or OFF device. They use Hardware like ADC0808, IC89C51 IC Microcontroller, MAX232 for serial communication. Objective of this paper is

- 1) Android application and implement hardware of drip irrigation control using internet that is suitable for real life implementation.
- 2) Control drips remotely as well as automatically that reduce overhead of farmer and it also reduce manpower that farmer needs to supply water to plants.
- 3) Is very beneficial for increasing crops production. This system can be used in area where water resources are less. This type of application we can use for large area farms [1]. This paper makes use of the Arduino based automated irrigation system that uses the android smartphone for

remote control. The system is designed using a soil and moisture sensor that provides a voltage signal that is proportional to the moisture content in the soil and then compared with the predetermined threshold value obtained by sampling of various soils for specific crops. The outcome of the comparison is that the appropriate data is fed to the Arduino processor. The Arduino is linked wirelessly via HC-05 to the android smart phone. The data received by the android smart phone using Arduino is displayed on the user interface (UI). The UI in the android smart phone allows the user to use easy remote control for the irrigation system that involves switching on and off of the driver motor through the Arduino wire which is linked to its controller commands from the android smart phone. This type of studies are conducted on a laboratory prototype suggests that this design is valuable and can be easily implemented on real time applications [2]. In this proposed system the moisture and fertility measured sensors are used and also used Zigbee for android mobiles to sending the SMS and also used drip irrigation automation for soil moisture measurement [7]. It utilizes wireless sensor network for getting different information from soil properties and environmental data using sensors. In this three nodes are used. One of them is acting as the master node which collects the data from the other nodes. Master node is the one who is communicating with the gateway. The other nodes are sending the data to the master node through Zigbee via USART using RS232. Then the gateway is sending all the data to PC that is stored for the user [9].

In this system we will be including data mining concept for the prediction of future outcomes. Data mining concept examines the large pre-existing data in order to produce the new information. We will be including the cloud computing concept for the communication between the pc and mobile. Cloud computing is a technique in which a large number of computers connected through a real-time communication network

III. Proposed System

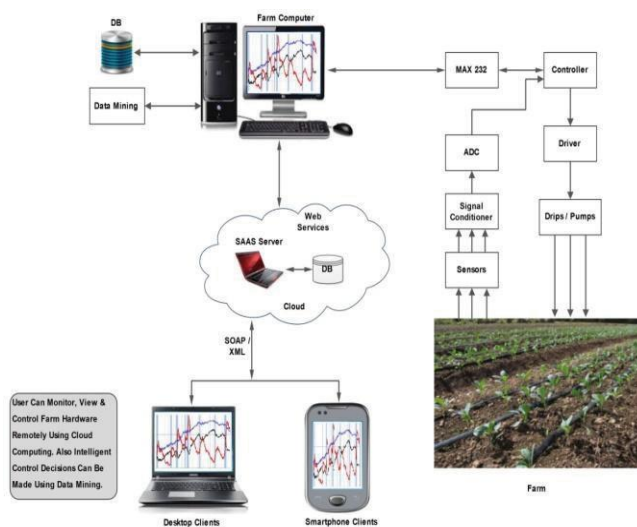


Fig.1. Proposed System

Water management system is microcontroller based and web application using the concept of cloud and data mining is used to monitor and control the water management system from remote location. Whole system is in WSN infrastructure. Water management is done through sensor reading from farm. Web application provides easy monitor and control mechanism to farmer. Graph generated in web application makes easy analysis. Cloud computing is a technique in which a large number of computers connected through a real-time communication network. Whole system is in WSN infrastructure. Water management is done through sensor reading from farm. Web application provides easy monitor and control mechanism to farmer. Graph generated in web application makes easy analysis. Cloud computing is a technique in which a large number of computers connected through a real-time communication network. In this system sensor senses the data and sends the reading to the microcontroller. Then microcontroller sends those readings to the farm pc through serial communication. Then these readings get stored in the database that is connected to farm pc in which we use data mining concept. These readings will be displayed on the android phone and pc.

Hardware:

- 1) Sensors: We use sensors like humidity, temperature, Light, Moisture.
- 2) Microcontroller: It is the heart of the system, means it controls all operations of the system.
- 3) MAX 232: It converts signals from an RS-232 serial port to a signal suitable for use in TTL compatible digital logic circuit.
- 4) Base station: It is the master unit to control valves and take data from all sensor nodes which are at the end.
- 5) Server: It collects data from all WSN network and takes decisions if the threshold crosses of any sensor unit.
- 6) Web application: It provides a graphical interface to the user and a graph of sensor data values is generated so it is easy to understand for the user to analyze and take decisions.

Software:

1. Windows 7 system

1 gigahertz (GHz) or faster 32-bit (x86) or 64-bit (x64) processor
Linux system requirements
700MHz processor, 512MB RAM, 5GB of hard-drive space

2. Android OS

Android is a Linux-based operating system designed primarily for touch screen mobile devices such as smartphones and tablet computers. In drip irrigation systems, pumps and valves may be manually or automatically operated by a controller. Most large drip irrigation systems employ some type of filter to prevent clogging of the small emitter flow path by small waterborne particles. New technologies are now being offered that minimize clogging.

Drip and subsurface drip irrigation is used almost exclusively when using recycled municipal wastewater.

Regulations typically do not permit spraying water through the air that has not been fully treated to potable water standards. Because of the way the water is applied in a drip system, traditional surface applications of timed-release fertilizer are sometimes ineffective, so drip systems often mix liquid fertilizer with the irrigation water. An emitting pipe is a type of drip irrigation tubing with emitters pre-installed at the factory with specific distance and flow per hour as per crop distance. An emitter restricts water flow passage through it, thus creating head loss required (to the extent of atmospheric pressure) in order to emit water in the form of droplets. This head loss is achieved by friction/turbulence within the emitter.

The soil moisture sensors are placed at every few feet with the probes in the ground. The soil moisture sensor is set to a particular level based on the type of soil and the crops being grown. The soil moisture is checked through the sensor. The sensors value is then sent to the NodeMCU or the Wi-Fi module. Since this acts like an arduino but can be connected to the Wi-Fi, the sensor reading are checked and matched to the set value of reading. If the value of the soil moisture sensor is equal to the set value, then a command is sent to the relay to switch OFF the motor. A message is then sent to the client's mobile which is connected to the Node. If the moisture of the soil is less, then the Node MCU sends a command to the relay to turn ON the motor.

When the water is opened, the drip irrigation system starts to drip the water at the roots. It allows water for half an hour and after half an hour; the moisture level is again checked and sent to the Node MCU. A message is sent to the client device saying that the plants have been watered at that particular time. The process then repeats all over. The intention of this project is to provide the user far away from the fields, a chance to keep an eye on their plants.

Sensor Implementation The system involves three layers of operations, namely, sensor layer, transport layer, application layer. Their functions are as follows:

- **Sensor/Information Collection Layer:** The main task of this layer is to achieve automatic and real-time transformation of the Physical figures of real-world agricultural production into digital information or data that can be processed in virtual world through various means.

The main task of Information collection layer is to mark the various kinds of information, and collect the marked information and the physical information in the real world by sensing techniques, and then transform them to digital information for processing. Information collection layer involves these techniques: two-dimension code labels and readers, RFID tags and readers, cameras, GPS sensors, terminals, cable networks, sensor networks and wireless networks

- **Transport/Network Layer:** The main task of this layer is to collect and summarize the agricultural information acquired through Sensor Layer for processing. Transport

Layer is the nerve centre and cerebra of Internet of Things for Agriculture, transmitting and processing data. The network layer includes the integration of the Internet network and telecommunication, network management centre, information centre and intelligent processing centres.

This project has been designed for surveillance of irrigation systems in farms without the need of manual checking of irrigation systems. For example, if you are staying in Bangalore, and have your farm in Andhra Pradesh or elsewhere and it is not possible for you to go to the farms every time to keep a tab on the plants. Instead, this project allows you to check up on your plants using a simple IoT system. The positive part of this project is that, the node used to connect the system to your smart device, also controls the flow of water from the pump and also the timing intervals in between the irrigation cycles. In this paper we will be discussing all about the project as to how it is constructed and how it works.

These are the main components used in this project:

Node MCU (ESP8266) Wifi Module: NodeMCU is an advanced API for hardware input/output device which can be dramatically reduces the work for configuring manipulative hardware. It uses a code like Arduino but rather is an interactive script called Lua. It is an open source IoT platform. It runs on a firmware of ESP8266 WiFi Soc produced by Espressif systems. NodeMCU has 16 input/output pins and hence 16 nodes can be connected to a single node. The ESP8266 is Wi-Fi Soc which is integrated with a Tensilica Xtensa LX106 core which is widely used in IoT applications.” NodeMCU” refers in default to the firmware rather than the development kits. ESP8266 is an inbuilt WiFi module which can also be used as an individual module as a Wifi module.

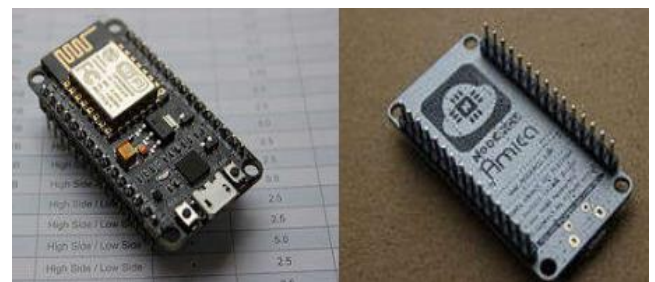


Fig.2

Solenoid Valve: A solenoid valve is an electromechanical a magnetic field and thereby operate a mechanism the characteristics of the current they use, the strength of the magnet field they generate, the mechanism they use to regula fluid and the characteristics of the fluid they control. The mechanisms vary armature actuators and rocker actuators. The valve can use a two to switch flows between ports. Multiple solenoid valves can be placed t frequently used control elements in fluidics. Thei many application areas. Solenoids offer fast and safe switching, high reliability, long service life, good medium compatibili the materials used, low control power and compact design.

Operation: Ordinary valves can have many ports and fluid paths. A 2 then the two ports are connected and fluid may flow between the ports; if the valve is open when the solenoid is not energized, then the valve is termed solenoid is not energized, then the valve is termed valve has 3 ports; it connects one port to either of the two other ports (typically a supply port and an exhaust port). Soleno are also characterized by how they operate. A small solenoid can generate a limited force. If that force is sufficient to open and close the valve, then a direct acting solenoid valve is possible.

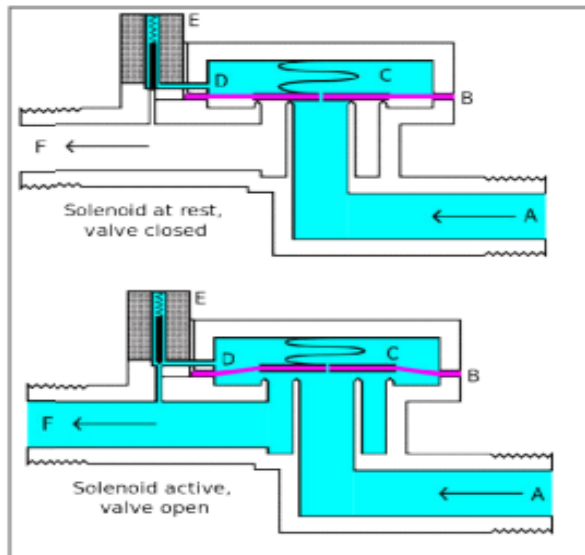


Fig.3

Soil Moisture sensor: Soil moisture sensors measurement of free soil moisture requires removing, drying, and weighting of a sample, soil moisture sensors measure the volumetric water content indirectly by using some other property of the soil, such as electrical res interaction with neutrons, as a proxy for the moisture content. be calibrated and may vary depending on environmental factors such as Reflected microwave radiation is affected by the soil moisture and is used for Portable probe instruments can be used by farmers or gardeners. volumetric water content. Another class of sensors measure another property of moisture in soils called sensors are usually referred to as soil water potential sensors and tensiometers and gypsum blocks.

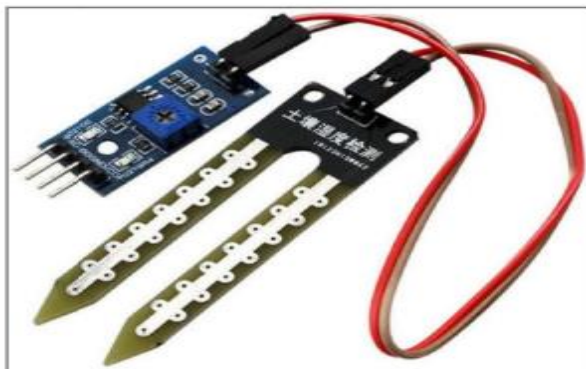


Fig.4

Drip irrigation system: Drip irrigation is a type of micro-irrigation system that has the potential to save water and nutrients by allowing water to drip slowly to the roots of plants, either from above the soil surface or buried below the surface. The goal is to place water directly into the root zone and minimize evaporation. Drip irrigation systems distribute water through a network of valves, pipes, tubing, and emitters. Depending on how well designed, installed, maintained, and operated it is, a drip irrigation system can be more efficient than other types of irrigation systems, such as surface irrigation or sprinkler irrigation.

Components used in drip irrigation (listed in order from water source) include:

- Pump or pressurized water source
- Water filter(s) or filtration systems: sand separator, Fertigation systems (Venturi injector) and chemigation equipment
- (optional) Backwash controller (Backflow prevention device)
- Pressure Control Valve (pressure regulator)
- Distribution lines (main larger diameter pipe, maybe secondary smaller, pipe fittings)
- Hand-operated, electronic, or hydraulic control valves and safety valves
- Smaller diameter polyethylene tube (often called "laterals")
- Poly fittings and accessories (to make connections)
- Emitting devices at plants (emitter or dripper, micro spray head, inline dripper or inline drip tube)

IV. Conclusion

A remote control for drip irrigation is the most beneficial approach for the farmers. This system reduces the extra man power of the farmer for his farm like supplying water to plants. This system uses different sensors like temperature, light, humidity and moisture and according to this sensor parameters farmer can control drip due to internet connectivity between client and servers, farmer can control drip component from anywhere This system remove drawback of previous systems like distance problem, range problem. The proposed system uses an externally hosted cloud computing platform to manage the database, android and the isolated server by the users across the country. This approach is very beneficial for the farmer for increasing crop production. This system can be used in area where water resources are less. This system can be used for large area farms.

References

- [1] J. Broeders, D. Croux, M. Peeters, T. Beyens, S. Duchateau, T. J. Cleij, P. Wagner, R. Thoelen, and W. De Ceuninck, "Mobile Application for Impedance-Based Biomimetic Sensor Readout," *IEEE Sensors J.*, vol.13, no.7, pp.2659-2665, July 2013.
- [2] Mahir Dursun and Semih Ozden, 1573-1582, April 2011. Shen Jin, Song Jingling, Wanf Shengde, Remote Measurement and Control System for Greenhouse Based on GSM SMS, IEEE international conference on Electronic and Measurement, 2007.
- [3] Shen Jin, Song Jingling, Han Qiuyan, Wang Shengde, Yang Yan, "School of Electric and Electronic Engineering"
- [4] Mark E. Casada, P.E., "Wheat Moisture Measurement With A

- Fringing Field Capacitive Sensor", USDA ARS Grain Marketing and Production Research Center Manhattan
- [5] Santoshkumar; Udaykumar; R.Y. , "Development of WSN system for precision agriculture", embedded and communication system, 2015.
 - [6] X. Wang, W. Yang, A. Wheaton, N. Cooley, and B. Moran, "Efficient registration of optical and IR images for automatic plant water stress assessment", *Comput. Electron. Agricult.*, vol.74,no.2, pp.
 - [7] Xihai Zhang, Junlong Fang, Xiao Yu 2010 "Design and Implementation of codes Based on CC2430 for the Agricultural Information Wireless Monitoring", IEEE.
 - [8] AWATIJ.S.,PATILV.S.(Automatic Irrigation Control by using wireless sensor networks) *Journal of Exclusive Management Science*–June2012-Vol 1 Issue 6- ISSN 2277.
 - [9] AbreuVM, PereiraLS (2002). Sprinkler irrigation systems design using ISAM im.
 - [10] Associate Prof.B.T.Salokhe, Miss Shilpa G.Gadekar," A wireless application of drip irrigation automation supported by soil moisture sensors " , *International Journal of Advanced Research in Computer and Communication Engineering*, Vol. 4,Issue4, April 2015.
 - [11] Venkata Narayana Eluri, K. Madhusudhana Rao, A. Srinag, "Wireless Solution for Water Saving In Agriculture Using Embedded System",*International Journal of Computer Science and Business Informatics*, ISSN:1694-2108—Vol.2,No.1.JUNE 2013.
 - [12] Prabha,TanujabaiJ.M,S.Krupesh,"Real-Time Atomization of Agricultural Environment for Social Modernization of Indian Agricultural System Using Arm 7" *International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering (An ISO 3297:2007 Certified Organization)* Vol. 3, Issue 6, June 2014.
 - [13] Tameem Ahmad, Shamim Ahmad, Mohammed Jamshed, "A knowledge based Indian Agriculture: With Cloud ERP Arrangement"2015 IEEE.
 - [14] S.Sumeetha, D.Sharmila, "Embedded based Remote Control Application using Mobile Phone in Irrigation", *International Journal of Power Control Signal and Computation (IJPCSC)*, Vol3, No1. Jan-Mar 2012 ISSN:0976-268X.
 - [15] Santoshkumar, Udaykumar R.Y, "Development of WSN System for Precision Agriculture", IEEE Sponsored 2nd International Conference on Innovations in Information Embedded and Communication Systems ICIECS'15 , 2016 IEEE.